

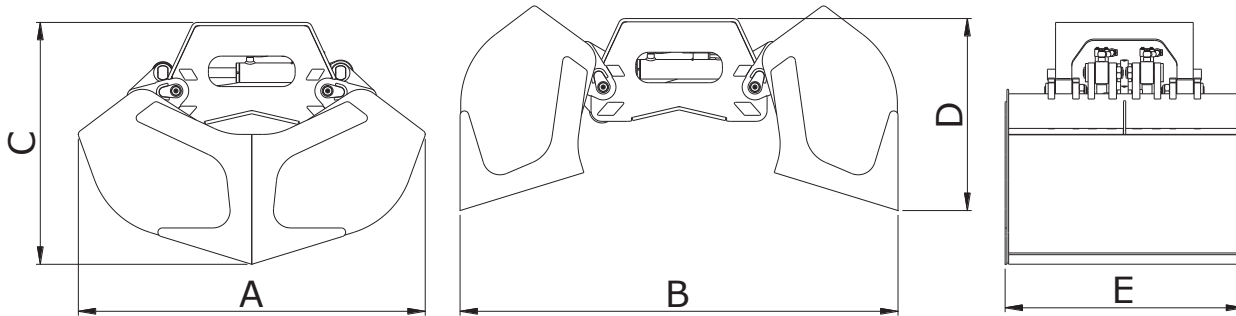
Railroad Ballast Buckets



The Moley Railroad Ballistic Buckets are designed to endure the toughest jobs. The structure of the body and the shape of the valves allow the bucket to contain the maximum dimensions. Best used to deposit/remove crushed stones from tracks.



- 24-Month Warranty
- 0.719 - 2.092 yd³ Capacity
- Safety Holding Valve
- Hardened Shaft
- Wear Resistant Blade
- Hardox 400 Construction
- 360° Rotation Available
- Fully Protected Cylinder

Railroad Ballast Buckets (Con't)



MODEL	CAPACITY		WEIGHT LBS	TEETH N	CYLINDERS N	SIZES (in.)				
	YD ³ 	YD ³ 				A	B	C	D	E
RBB 2	0.719	0.784	1,786	5	2	70	80	44	35	33
RBB 3	0.980	1.046	1,896	7	2	70	80	44	35	43
RBB 4	1.242	1.373	2,006	7	2	70	80	44	35	55
RBB 5	1.634	1.765	2,116	7	2	70	80	44	35	72
RBB 6	1.961	2.092	2,447	9	2	70	80	44	35	87

MODEL	LOAD CAPACITY	FORCE	PRESSURE		REC OILFLOW		TEMPS		MACHINE
	TONS	TONS	PSI		G/MIN		SEC		TONS
			CLOSE	OPEN	CLOSE	OPEN	CLOSE	OPEN	
RBB 2	5.5	5.6	4,786	4,351	34	37	1.5	1	13-18
RBB 3	5.5	5.6	4,786	4,351	34	37	1.5	1	15-22
RBB 4	5.5	5.6	4,786	4,351	34	37	1.5	1	15-26
RBB 5	5.5	5.6	4,786	4,351	34	37	1.5	1	18-26
RBB 6	5.5	5.6	4,786	4,351	34	37	1.5	1	18-26