


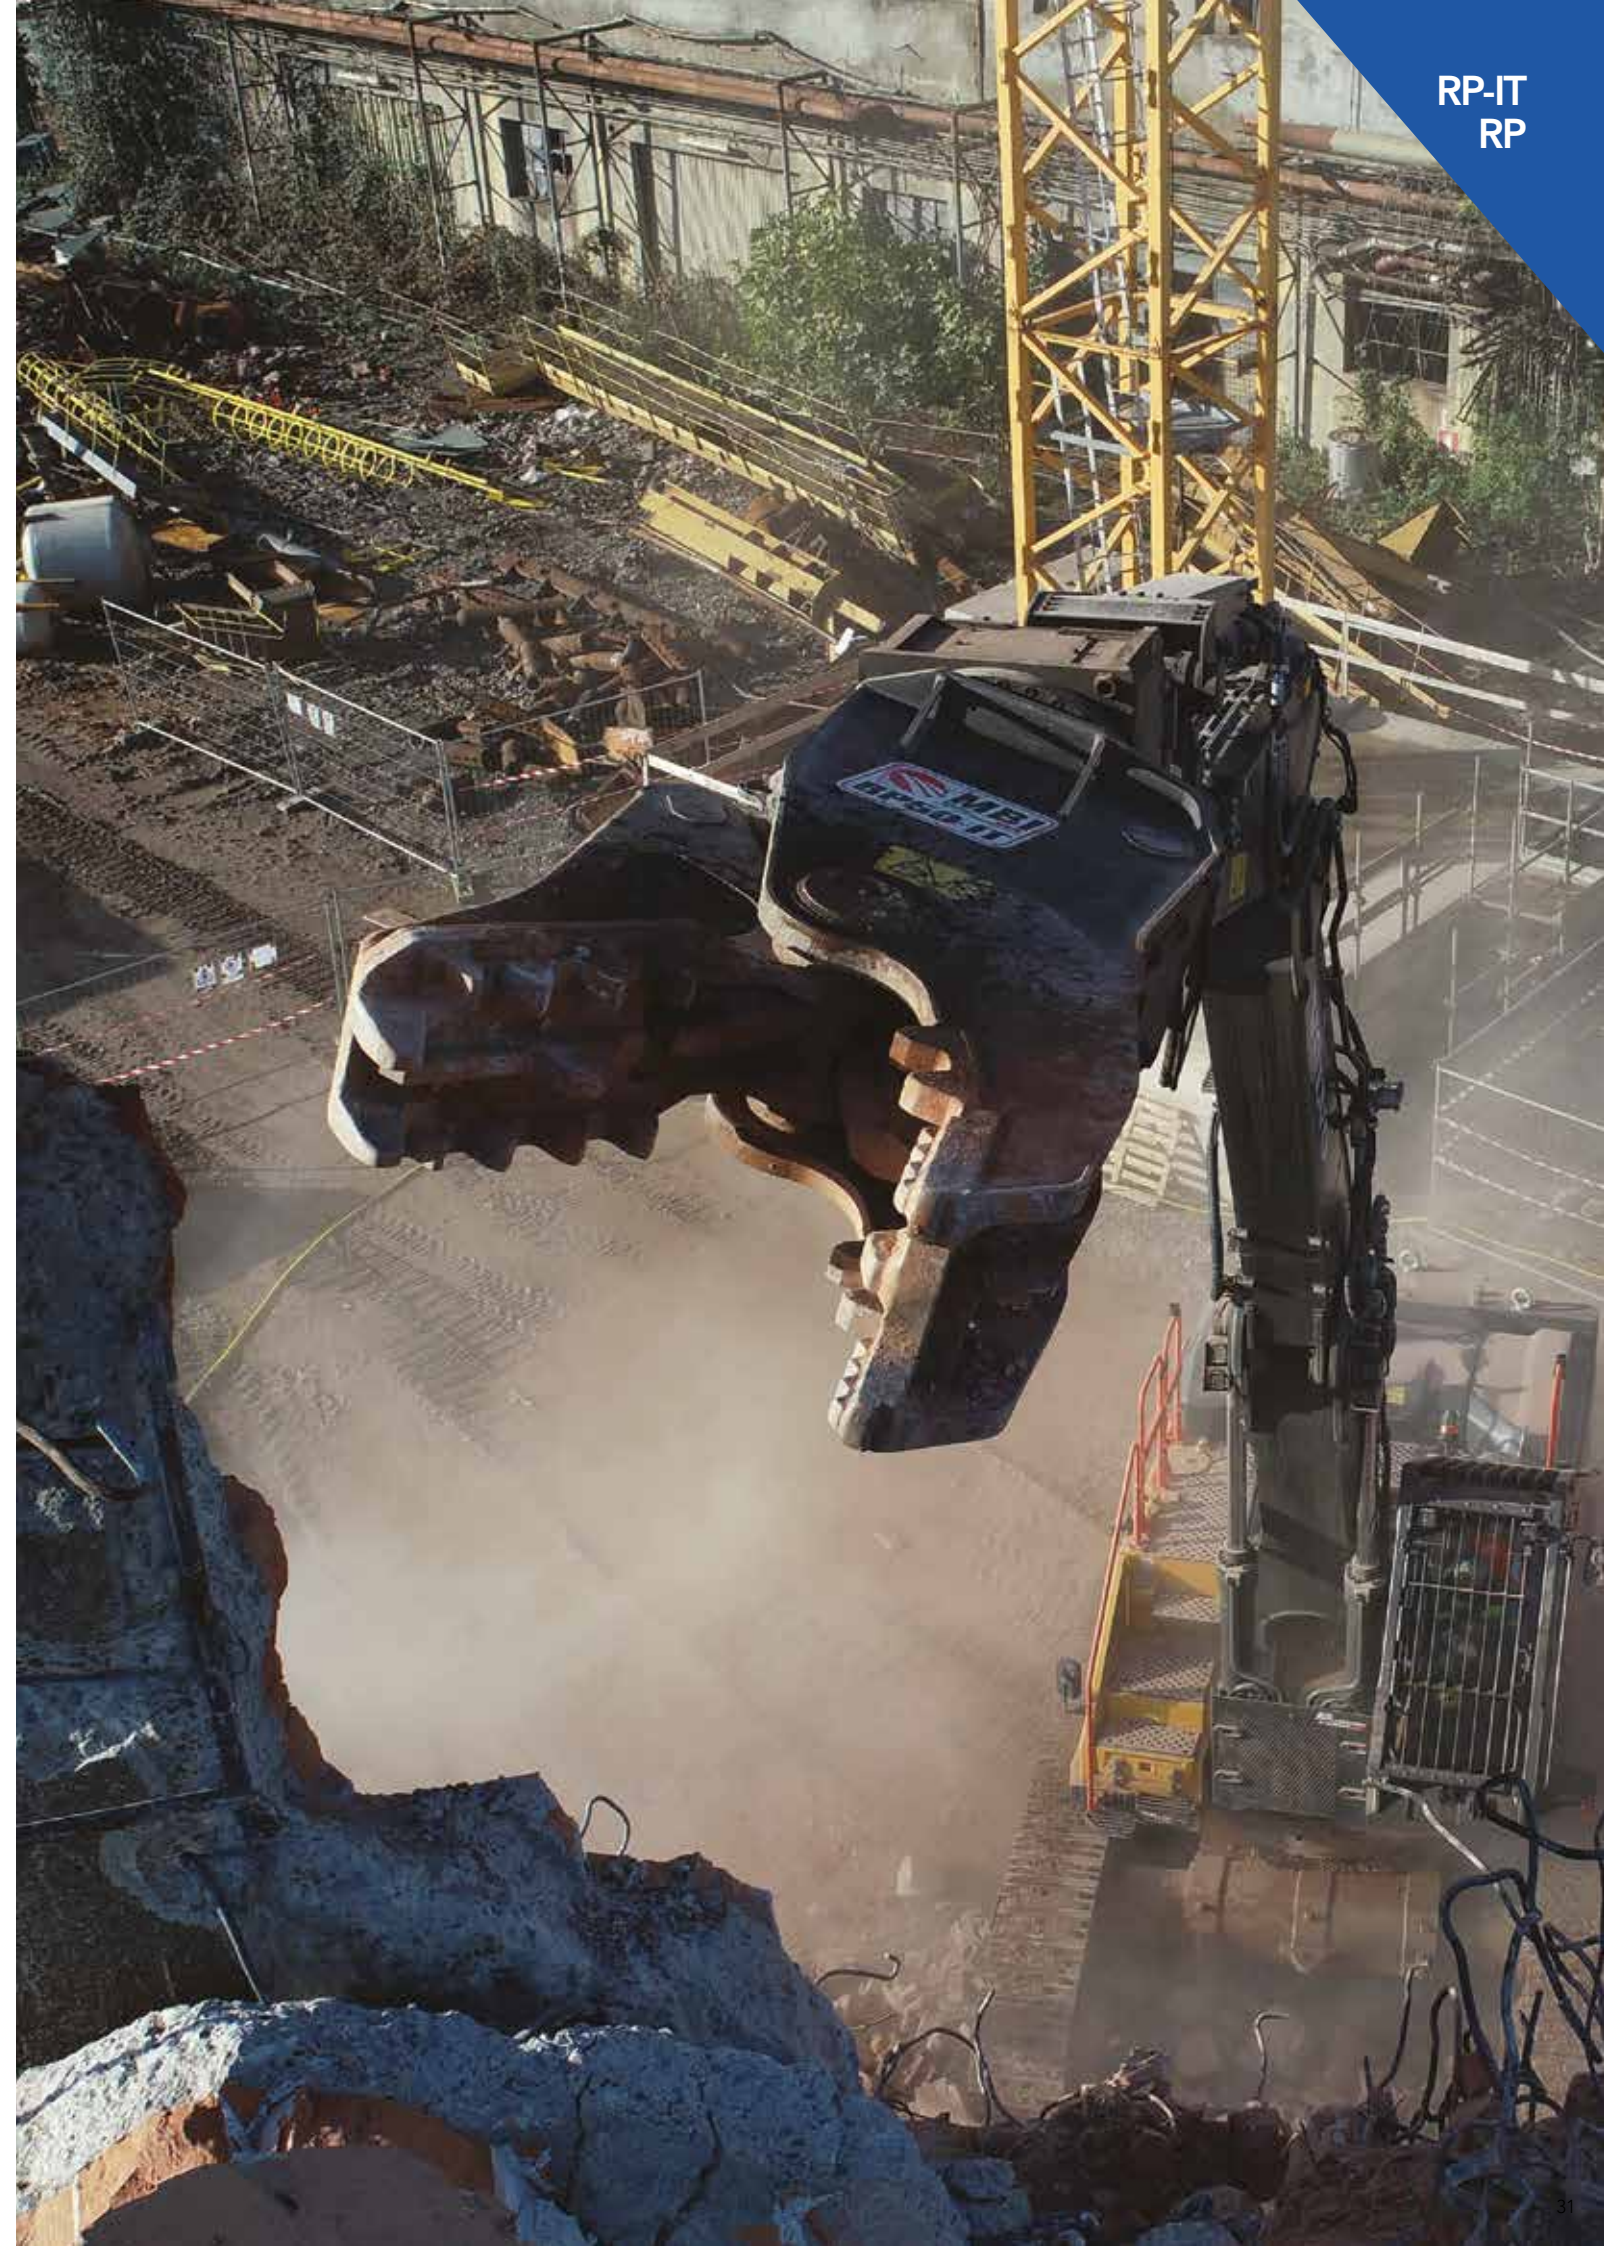







# RP-LINE

## ROTATING PULVERIZERS






# RP-IT

## INTERCHANGEABLE TEETH

### PRIMARY AND SECONDARY DEMOLITION



Video at work




The **reinforced structure** of the RP-IT is designed to last for the demolition of reinforced concrete, even at height.



The **specific design** of the mouth is designed for effective ground demolition.

New **cylinder shield\*** designed for the best protection in every situation.

\* Check models availability with the sales office



The **crushing process** separates the concrete from the inside iron reinforcement.




The **hydraulic rotation** enables precise positioning during in height demolitions and ground operations.



The **Speed-Valve** reduces opening and closing times, improving productivity.



**Interchangeable plates**, made up of 2 independent parts, allow quick replacement of worn teeth.



Real-time tracking of equipment performance.


The **new MBI tooth design** has a sharper profile which deeply engraves the concrete. The **new fixing system** allows for easier replacement.





The **Interchangeable plates** are available in **two versions** with different tooting to adapt to primary or secondary demolition.

The two parts that make up the plate are made by a **fusion** process that ensure high tresistance.\*

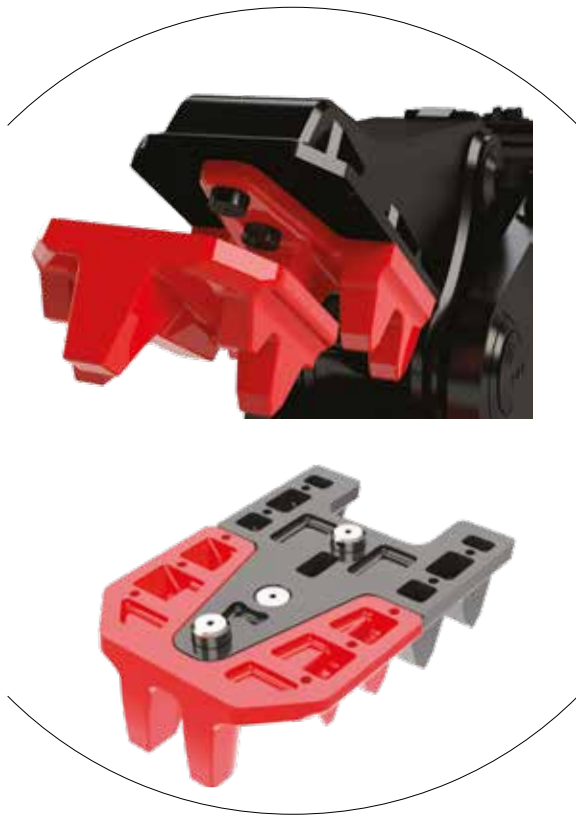

UPPER JAW PLATES

SINGLE TOOTH PLATE



DOUBLE TOOTH PLATE



LOWER JAW PLATES



RP10-IT  
RP16-IT  
RP20-IT  
RP30-IT



RP40-IT  
RP50-IT  
RP80-IT

\* Check availability with the sales office

DATA SHEETS

RIF: 97872IT/E 04/21 REV03

BT RPTT 10-80 10

MODEL		RP10-IT	RP16-IT	RP20-IT
ROTATION		360° Hydraulic		
EXCAVATOR WEIGHT	t	10-15	16-20	21-26
TOOL WEIGHT *	kg	1100	1690	2000
OPENING	mm	580	700	750
HEIGHT MAX.	mm	1710	2150	2130
HYDRAULIC WORKING PRESSURE	bar	300-350	300-350	300-350
OIL FLOW	l/min	100-180	130-150	180-200
CRP PLATE		●	●	●
PP PLATE		○	○	●

We are constantly improving our products and therefore we reserve the right to change the design and technical specifications without prior notice.

RP30-IT	RP40-IT	RP50-IT	RP80-IT
360° Hydraulic			
27-35	35-50	50-65	70-95
2850	4100	5200	8200
900	1000	1100	1250
2400	2780	3000	3600
300-350	300-350	300-350	300-350
200-220	220-280	335-375	500-600
●	●	●	●
●	●	●	●

\* Tool weight does include Mantovanibenne top bracket.  
○ Not available ● Available